

COMPACT

Moulded Case Circuit Breaker

The new generation of reliable ComPacT circuit breakers features improved performance and easier installation.

- Gain a competitive edge with easy-to-upgrade, wireless connectivity of circuit breakers and panels.
- Experience easier installation thanks to a new ergonomic front-plate design.
- Improve build and installation times with screwless, plug-and-play auxiliaries.



ComPacT™ molded-case circuit breaker

se.com/compact-nsx

Life Is On

Schneider
Electric

New generation of ComPacT MCCBs



- Ethernet based communication system for monitoring, control, alarm notification for energy, asset and network management
- Built-in energy metering with combined accuracy class of 2% for precise measurement
- Wireless auxiliary Contacts accelerates overall wiring time: status communication is done very simply and commissioned wirelessly
- Intelligent discrimination for continuity of service and enhanced discrimination by cascading
- Patented reflex tripping, independent of other protection functions, ensures ultra fast tripping in the event of very high short circuit
- Encapsulated roto-active double break contact system limits fault current for extended system life
- Best in class electrical life (*30k cycles for NSX 100 @ 440 V*) reduces operational expenditure
- High performance => $I_{cs} = I_{cu} = 100\text{kA @ }690\text{V AC}$

Range Details:

- 16A to 630A in two frames sizes
- Breaking capacity up to 200kA @ 415V
- TMD and Electronic based trip unit
- Available in Fixed, Plug-in and Draw out type versions

**NSX Thermal Magnetic Trip Unit (TM-D)**

- $I_{cs} = 100\% I_{cu}$ as per IEC 60947-2
- Adjustable thermal setting 0.7 to 1 x I_n
- Adjustable magnetic setting 5 to 10 x I_r **
- Transparent cover for trip unit as standard
- Breaking Capacity enhancement upto 150kA with a higher capacity upstream (Cascading)

Breaking Capacity I_{cu} as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
25kA	16A	C10B3TM016	13230	C10B6TM016	19010
	25A	C10B3TM025 ✓	13230	C10B6TM025	19010
	32A	C10B3TM032 ✓	13230	C10B6TM032	19010
	40A	C10B3TM040 ✓	13230	C10B6TM040	19010
	50A	C10B3TM050	13230	C10B6TM050	19010
	63A	C10B3TM063 ✓	13230	C10B6TM063 ✓	19010
	80A	C10B3TM080 ✓	13230	C10B6TM080	19010
	100A	C10B3TM100 ✓	13230	C10B6TM100 ✓	19010
	125A	C16B3TM125 ✓	23450	C16B6TM125 ✓	28880
	160A	C16B3TM160 ✓	25090	C16B6TM160 ✓	31470
	200A	C25B3TM200	36140	C25B6TM200 ✓	43480
	250A	C25B3TM250 ✓	36840	C25B6TM250 ✓	44340
36kA	16A	C10F3TM016 ✓	16120	C10F6TM016	20410
	25A	C10F3TM025 ✓	16120	C10F6TM025	20410
	32A	C10F3TM032 ✓	16120	C10F6TM032 ✓	20410
	40A	C10F3TM040 ✓	16120	C10F6TM040	20410
	50A	C10F3TM050	16120	C10F6TM050	20410
	63A	C10F3TM063 ✓	16120	C10F6TM063 ✓	20410
	80A	C10F3TM080 ✓	16120	C10F6TM080	20410
	100A	C10F3TM100 ✓	16120	C10F6TM100 ✓	20410
	125A	C16F3TM125 ✓	24090	C16F6TM125 ✓	30000
	160A	C16F3TM160 ✓	25290	C16F6TM160 ✓	32360
	200A	C25F3TM200 ✓	36610	C25F6TM200 ✓	45120
	250A	C25F3TM250 ✓	37660	C25F6TM250 ✓	46940
50kA	16A	C10N3TM016	19170	C10N6TM016	24040
	25A	C10N3TM025	19170	C10N6TM025	24040
	32A	C10N3TM032 ✓	19170	C10N6TM032	24040
	40A	C10N3TM040 ✓	19170	C10N6TM040	24040
	50A	C10N3TM050	19170	C10N6TM050	24040
	63A	C10N3TM063 ✓	19170	C10N6TM063	24040
	80A	C10N3TM080 ✓	19170	C10N6TM080	24040
	100A	C10N3TM100 ✓	19170	C10N6TM100	24040
	125A	C16N3TM125 ✓	28970	C16N6TM125	33310
	160A	C16N3TM160 ✓	29580	C16N6TM160	34970
	200A	C25N3TM200 ✓	39460	C25N6TM200	48200
	250A	C25N3TM250 ✓	40210	C25N6TM250	51140
70kA	16A	C10H3TM016	24510	C10H6TM016	31610
	25A	C10H3TM025	24510	C10H6TM025	31610
	32A	C10H3TM032	24510	C10H6TM032	31610
	40A	C10H3TM040	24510	C10H6TM040	31610
	50A	C10H3TM050	24510	C10H6TM050	31610
	63A	C10H3TM063 ✓	24510	C10H6TM063	31610
	80A	C10H3TM080	24510	C10H6TM080	31610
	100A	C10H3TM100 ✓	24510	C10H6TM100	31610
	125A	C16H3TM125	45620	C16H6TM125	48480
	160A	C16H3TM160 ✓	46110	C16H6TM160	49460
	200A	C25H3TM200	52410	C25H6TM200	68100
	250A	C25H3TM250 ✓	52910	C25H6TM250	68780

Note:

- ** applicable for NSX 200A & 250A
- For higher breaking capacities (100kA and 150kA); for Generator Protection MCCB and other special application MCCB, contact our nearest Sales office.

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

✓ NORMAL STOCK ITEMS

W.E.F. January 30th, 2023

**NSX Micrologic 2 (μP -ASIC based)**

- Protection type LS01N
- Ics = 100% Icu as per IEC 60947-2
- Adjustable overload from 0.40 to 1 x In
- Adjustable short circuit from 1.5 to 10 x Ir
- Innovative front indication LED's (Ready, Overload pre-alarm & Overload)
- Two frame sizes up to 630A
- Breaking Capacity enhancement upto 150kA with a higher capacity upstream (Cascading)
- Adjustable neutral protection - N, N/2, OFF for 4 Pole MCCB

Breaking Capacity Icu as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
25kA	40A	C10B32D040 ☒	23520	C10B42D040	30270
	100A	C10B32D100 ☒	23520	C10B42D100 ☒	30270
	160A	C16B32D160 ☒	30040	C16B42D160 ☒	38320
	250A	C25B32D250 ☒	39480	C25B42D250 ☒	50640
36kA	40A	C10F32D040	23910	C10F42D040	30410
	100A	C10F32D100 ☒	23910	C10F42D100 ☒	30410
	160A	C16F32D160 ☒	30570	C16F42D160 ☒	42250
	250A	C25F32D250 ☒	41330	C25F42D250 ☒	57280
	400A	C40F32D400 ☒	57820	C40F42D400 ☒	65920
	630A	C63F32D630 ☒	61390	C63F42D630 ☒	78530
50kA	40A	C10N32D040	28690	C10N42D040	38810
	100A	C10N32D100 ☒	28690	C10N42D100 ☒	39960
	160A	C16N32D160 ☒	36340	C16N42D160	47290
	250A	C25N32D250 ☒	47210	C25N42D250 ☒	61360
	400A	C40N32D400 ☒	59910	C40N42D400 ☒	77810
	630A	C63N32D630 ☒	62100	C63N42D630 ☒	82260
70kA	40A	C10H32D040	36220	C10H42D040	45870
	100A	C10H32D100	36770	C10H42D100	45870
	160A	C16H32D160	48560	C16H42D160	61980
	250A	C25H32D250	54540	C25H42D250	78710
	400A	C40H32D400 ☒	68160	C40H42D400	89510
	630A	C63H32D630 ☒	69850	C63H42D630	108650

Note: For higher breaking capacities (100kA and 150kA); for Generator Protection MCCB and other special application MCCB, contact our nearest Sales office.

NSX Micrologic 2 (μP -ASIC based) / TMD / MA+ shunt +GFP

- Protection type LS01GN
- Ics = 100% Icu as per IEC 60947-2
- Fault indication for GF (LED type) meant for human safety
- Adjustable overload from 0.36 to 1 x In
- Adjustable short circuit from 1.5 to 10 x Ir
- Adjustable earth fault sensitivity selection 10 to 60%
- Innovative front indication LED's (Ready, Overload pre-alarm & Overload)
- Two frame sizes up to 630A
- Suitable for 3P3W & 3P4W electrical distribution network
- Breaking Capacity enhancement upto 150kA with a higher capacity upstream (Cascading)
- Adjustable neutral protection - N, N/2, OFF for 4 Pole MCCB



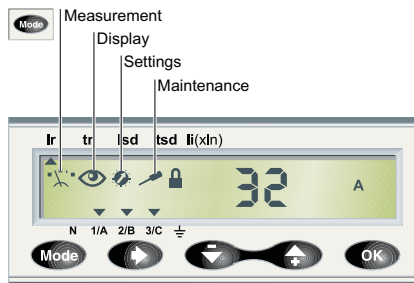
MCCB Frame	Relay Module rated current	3 Ph + 3W Reference	Unit MRP [₹]	3 Ph + 4W Reference	Unit MRP [₹]
CVS/NSX100	32, 40, 50, 63, 80, 100	GFP11CT13P ☒	7370	GFP11CT14P ☒	8070
CVS/NSX 160 / 250	125, 160, 200, 250	GFP12CT23P ☒	8370	GFP12CT24P ☒	9460
CVS/NSX 400 / 630	400, 630	GFP13CT33P ☒	12670	GFP13CT34P ☒	13820

Note: Kindly order NSX/CVS MCCB +GFP+. Shunt trip coil.

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

☒ NORMAL STOCK ITEMS

W.E.F. January 30th, 2023

**NSX Micrologic 6E****Protection**

- $I_{cs} = 100\% I_{cu}$ as per IEC 60947-2
- Breaking Capacity enhancement upto 150kA with a higher capacity upstream (Cascading)
- External Neutral CT required for highly un-balanced TP-N system (* has to be ordered at extra price)
- Adjustable neutral protection - N, N/2, OFF and oversized neutral (standard feature) for 4 Pole MCCB.
- Adjustable overload from I_r 0.4 to $1 \times I_n$ and $t_r = 0.5$ to 16 s
- Adjustable short circuit from I_{sd} 1.5 to $10 \times I_r$ and $t_{sd} I_{2t}$ ON/OFF 0.1 to 0.4s
- Adjustable earth fault 0.4 to $1 \times I_n$ (for $I_n=40A$) & 0.2 to $1 \times I_n$ (for $I_n>40A$) and $t_g I_{2t}$ ON/OFF 0.1 to 0.4s
- Instantaneous protection I_i $1.5 \times I_n$ to $15 \times I_n$ (40 - 160A), $12 \times I_n$ (250 to 400A) and $11 \times I_n$ (630A)
- Zone Selective Interlocking (ZSI) as standard

Measurement & Diagnostics

- Current, Voltage, Power factor and Frequency measurement
- Power Quality Indicator (THD for Current and Voltage)
- Active, Reactive and Apparent Power measurement and **Embedded Energy metering**
- Demand and maximum demand values
- Indications for fault types, Alarms and Histories with timestamping
- Fault distinction on the display of trip unit (type of fault, interrupted fault current and faulty phase)
- Operation, trip and alarm counters; Operating Hours counter
- Contact wear: Load profile and thermal image

Breaking Capacity I_{cu} as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
36kA	100A	C10F36E100	On Request	C10F46E100	On Request
	160A	C16F36E160		C16F46E160	
	250A	C25F36E250		C25F46E250	
	400A	C40F36E400		C40F46E400	
	630A	C63F36E630		C63F46E630	
50kA	100A	C10N36E100		C10N46E100	
	160A	C16N36E160		C16N46E160	
	250A	C25N36E250		C25N46E250	
	400A	C40N36E400		C40N46E400	
	630A	C63N36E630		C63N46E630	
70kA	100A	C10H36E100		C10H46E100	
	160A	C16H36E160		C16H46E160	
	250A	C25H36E250		C25H46E250	
	400A	C40H36E400		C40H46E400	
	630A	C63H36E630		C63H46E630	

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

☒ NORMAL STOCK ITEMS

W.E.F. January 30th, 2023

**NSX Magnetic Trip Unit MA type**

- Ics = 100% Icu as per IEC 60947-2
- Adjustable magnetic setting Im 6 to 14 x In (2.5 to 100A) & 9 to 14 x In (150 to 200A)
- Type - 2 Co-ordination charts upto 110 kW at 400V
- Breaking Capacity enhancement upto 150kA with a higher capacity upstream (Cascading)
- Adjustable neutral protection - N, N/2, OFF for 4 Pole MCCB

Breaking Capacity Icu as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]
36kA	150A	C16F3MA150	25170
	220A	C25F3MA220	41300
50kA	150A	C16N3MA150	30740
	220A	C25N3MA220	45330
70kA	150A	C16H3MA150	46110
	220A	C25H3MA220	71510

**MCCBs for DC Network Protection**

16A to 1200A in Two frames sizes with Thermal Magnetic Trip Unit (TMD)

- Up to 1200 A for ComPact NSX DC, protection is provided by thermal-magnetic trip units
- TM-D up to 160 A: fixed thermal threshold and magnetic pick-up
- TM-D up to 63 A: adjustable thermal threshold and fixed magnetic pick-up
- TM-DC from 80 to 250 A: fixed or adjustable (for 200 and 250 A) magnetic pick-up and adjustable thermal threshold
- TM-DC from 250 A to 1200 A adjustable magnetic pick-up and adjustable thermal threshold
- TM-G, up to 250 A: adjustable thermal threshold and fixed low magnetic pick-up to protect long cables

Breaking Capacity Icu as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
36kA	400A	C40F3TM400D	49520	C40F4TM400D	56220
	500A	C63F3TM500D	59400	C63F4TM500D	72610
	600A	C63F3TM600D	62730	C63F4TM600D	75940
100kA	400A	C40S3TM400D	70710	C40S4TM400D	86120
	500A	C63S3TM500D	77200	C63S4TM500D	93120
	600A	C63S3TM600D	77200	C63S4TM600D	93120

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

☑ NORMAL STOCK ITEMS

W.E.F. January 30th, 2023

**NSX Micrologic 4 Vig**

- Standard protection for electrical distribution-overload, short circuit & neutral protection
- Earth leakage protection-Adjustable leakage threshold ($I_{\Delta n}$) and adjustable time delay threshold
 - Sensitivity $I_{\Delta n}$ (A)
 - Type A: 30mA - 100mA - 300mA - 500mA - 1A - 3A - 5A (for the ratings 40 to 250A)
 - Type B: 300mA - 500mA - 1A - 3A - 5A - 10A (for the ratings 400 to 570A)
- Alarming & Fault Indication

Breaking Capacity I_{cu} as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
25kA	40A	C10B34V040	On Request	C10B44V040	On Request
	100A	C10B34V100		C10B44V100	
	160A	C16B34V160		C16B44V160	
	250A	C25B34V250		C25B44V250	
36kA	40A	C10F34V040		C10F44V040	
	100A	C10F34V100		C10F44V100	
	160A	C16F34V160		C16F44V160	
	250A	C25F34V250		C25F44V250	
	400A	C40F34V400		C40F44V400	
50kA	570A	C63F34V570		C63F44V570	
	40A	C10N34V040		C10N44V040	
	100A	C10N34V100		C10N44V100	
	160A	C16N34V160		C16N44V160	
	250A	C25N34V250		C25N44V250	
	400A	C40N34V400		C40N44V400	
70kA	570A	C63N34V570		C63N44V570	
	40A	C10H34V040		C10H44V040	
	100A	C10H34V100		C10H44V100	
	160A	C16H34V160		C16H44V160	
	250A	C25H34V250		C25H44V250	
	400A	C40H34V400		C40H44V400	
	570A	C63H34V570		C63H44V570	

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

☒ NORMAL STOCK ITEMS

W.E.F. January 30th, 2023



Indication contacts



SDTAM remote indication relay module



SDx remote indication relay module



Voltage Release



Motor Mechanism

Description	Reference	Unit MRP [₹]
Auxiliary contacts (changeover) Multifunction		
OF or SD or SDE or SDV	29450 ☒	1090
OF or SD or SDE or SDV low level	29452	1270
SDE adaptor for trip unit TM or MA or Micrologic 2 \$\$	LV429451 ☒	940
SDX 2-PROGRAMMABLE CONTACTS FOR MICROLOGIC		
SDx module 24/415 V AC/DC	LV429532	16230
SDTAM contactor tripping module for Micrologic 2- M/6 E-M		
SDTAM 24/415 V AC/DC overload fault indication	LV429424	16600

\$\$ To be considered along with SDE contact for MCCB with TMD/MA./Micrologic 2 protection.

Voltage Releases

Description	Shunt Release Reference	Unit MRP [₹]	Undervoltage Reference	Unit MRP [₹]
AC				
24 V 50/60 Hz	LV429384	3170	LV429404	3920
48 V 50/60 Hz	LV429385		LV429405	
110-130 V 50/60 Hz	LV429386 ☒		LV429406 ☒	
220-240 V 50/60 Hz	LV429387 ☒		LV429407 ☒	
380-415 V 50 Hz	LV429388 ☒		LV429408 ☒	
525 V 50 Hz	LV429389		LV429409	5620
DC				
12 V	LV429382	3170	LV429402	3880
24 V	LV429390 ☒		LV429410 ☒	
30 V	LV429391		LV429411	5620
48 V	LV429392		LV429412	3880
60 V	LV429383	4490	LV429403	5620
125 V	LV429393	3170	LV429413	3880
250 V	LV429394		LV429414 ☒	3850

Installation Accessories

Description	100/160/250A Reference	Unit MRP [₹]	400/630A Reference	Unit MRP [₹]
Spreaders & Phase Barrier				
Spreaders (Set of 3) 3P	LV431563 ☒	730	32492 ☒	1650
Spreaders (Set of 4) 4P	LV431564 ☒	970	32493 ☒	2100
Phase Barrier (Set of 6)	*	-	LV432570 ☒	990
Interlocking				
For Breaker with Rotary Handle	LV429369	11340	LV432621	14280
For Breaker with Toggle	LV429354	13650	LV432614	14420
Mechanical Interlocking with Base Plate	29349**	-	32609**	-
Locking of Rotary Handle				
Locking Device	LV429344 ☒	730	LV432604 ☒	990
Ronis Keylock (1 Lock + 1 Key set)	41940 ☒	5460	41940 ☒	5460
Ronis Keylock (2 Locks + 1 Key set)	41950 ☒	9190	41950 ☒	9190
Profalux Keylock (1 Lock + 1 Key set)	42888	8530	42888	8530
Profalux Keylock (2 Locks + 1 Key set)	42878	10710	42878	10710

* supplied as standard with spreader

** Mechanical Interlocking with Base Plate to be ordered with Safety trip interlock (LV429270 for 29349 and LV432520 for 32609)

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

☒ NORMAL STOCK ITEMS

W.E.F. January 30th, 2023



FDM121: Front Display Module



Test Battery



Power Supply ModuleB



SCM: Breaker Status and Control Module

Motor Mechanism

Type	Voltage	100/160A Reference	Unit MRP [₹]	250A Reference	Unit MRP [₹]	400/630A Reference	Unit MRP [₹]
Motor Mechanism Modules with SDE Adaptor ⁽¹⁾							
AC 50/60 Hz	48-60 V	LV429440	36970	LV431548	40860	LV432639	47510
	110-130 V	LV429433	29580	LV431540	33320	LV432640	
	220-240 V	LV429434 ✓		LV431541 ✓	32690	LV432641 ✓	
	380-415 V	LV429435		LV431542		LV432642	47320
	440-480 V	LV429435		LV431542		LV432647	48420
DC	24-30 V	LV429436	40510	LV431543	43930	LV432643	58050
	48-60 V	LV429437		LV431544		LV432644	
	110-130 V	LV429438		LV431545		LV432645	
	250 V	LV429439		LV431546		LV432646	

(1) With every Motor Mechanism, please order 1 no. auxiliary contact additionally. For other voltages of motor mechanism please consult Customer Care.

Description	100/160/250A Reference	Unit MRP [₹]	400/630A Reference	Unit MRP [₹]
Locking of Motor Mechanism				
Keylock adaptor + Ronis keylock (special)	LV429449	4090	-	-
Locking Device	-	-	LV432649	1450
Ronis Keylock	-	-	41940 ✓	5460
Profalux Keylock	-	-	42888	8530
Torque Limiting Screws (Set of 12)	LV429513	3370	LV432513	3670

Monitoring and Control, test tools- ComPact and NSX100 - 630

Monitoring and Control (Remote Operation)

Description	Reference	Unit MRP [₹]
ULP Display Module		
Switchboard front display module FDM121	TRV00121 ✓	16760
ULP Wiring Accessories		
NSX cord L = 0.35 m	LV434200	3880
NSX cord L = 1.3 m	LV434201	3950
5 RJ45/RJ45 MALE Cord L = 1m	TRV00810	3670
10 Stacking connectors for COM interface	TRV00217	5710
ULP Communication Module		
IFM MODBUS Interface Module	LV434000	13500
BSCM (Breaker Status and Control Module)	LV434205 ✓	12420
Power Supply Modules		
External power supply module 24 V DC-1 A OVC IV		
200-240 V AC	LV454444 ✓	19820
Pocket battery for Micrologic NSX100-630	LV434206	24370

Maintenance Module for advanced configuration and testing, contact our nearest Sales office.

ULP = Universal Logic Plug

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

✓ NORMAL STOCK ITEMS

W.E.F. January 30th, 2023



Direct Rotary Handle



Extended Rotary Handle



Plug in Base



Draw-Out Chassis Kit

Description	100/160/250A Reference	Unit MRP [₹]	400/630A Reference	Unit MRP [₹]
Rotary Handles				
Standard direct black handle	LV429337 ☒	1530	LV432597 ☒	2300
Standard extended rotary handle	LV429338 ☒	2100	LV432598 ☒	3730
Plug in Base (Complete Kit)				
3 Pole	LV429289 ☒	12080	LV432538 ☒	27720
4 Pole	LV429290 ☒	15640	LV432539 ☒	34550
Draw-Out Chassis Kit				
3 Pole				
Plug In base	LV429289 ☒	12080	LV432538 ☒	27720
Chassis Side Plate for base	LV429282 ☒	15950	LV432532 ☒	20200
Chassis Side Plate for breaker	LV429283 ☒	8460	LV432533 ☒	11780
4 Pole				
Plug In base	LV429290 ☒	15640	LV432539 ☒	34550
Chassis Side Plate for base	LV429282 ☒	15950	LV432532 ☒	20200
Chassis Side Plate for breaker	LV429283 ☒	8460	LV432533 ☒	11780
Plug In / Withdrawable version Accessories				
Automatic Auxilliary Connectors				
1 9-wire fixed connector (for base)	LV429273	1680	LV429273	1680
1 9-wire moving connector (for circuit breaker)	LV429274	1180	LV432523 ☒	1260
1 support for 2 moving connectors	LV429275	900	LV432525 ☒	900
Manual Auxilliary Connectors				
9-wire manual auxiliary connector (fixed + moving)	LV429272	5800	LV429272	5800

Note: Above auxiliary connectors to be used with Plug-in and Withdrawable MCCB when Auxiliary Contact, Shunt, UnderVoltage or Motor Mechanism is used.

Unique Modular Ground Fault Protection



Earth Fault Protection for EasyPact CVS/ ComPact NSX MCCBs Modular Device for EasyPact CVS/ ComPact NSX Range Moulded Case Circuit Breakers

- Adjustable earth fault sensitivity selection 10 to 60%
- Adjustable time delay Inst/ 0.5 - 3 sec.
- System healthiness check through LED indication
- Individual fault indication for OL/SC, EF when used with ComPact NSX & EasyPact CVS (Optional)
- Test facility to check healthiness of earth fault protection system without tripping MCCB
- Suitable for 3P3W & 3P4W electrical distribution network

MCCB Frame	Relay Module rated current	3 Ph + 3W Reference	Unit MRP [₹]	3 Ph + 4W Reference	Unit MRP [₹]
CVS/NSX100	32, 40, 50, 63, 80, 100	GFP11CT13P ☒	7370	GFP11CT14P ☒	8070
CVS/NSX 160 / 250	125, 160, 200, 250	GFP12CT23P ☒	8370	GFP12CT24P ☒	9460
CVS/NSX 400 / 630	400, 630	GFP13CT33P ☒	12670	GFP13CT34P ☒	13820

Note: Kindly order one no. Shunt trip coil along with one Ground Fault Protection Module for CVS100 to 630.

Earth Leakage Protection

ComPact NSX VigiPacT Add-on Module



- Compliance with Standards - IEC60947-2 annex B, IEC 60755, Type A, immunity to DC components up to 6 mA
- Sensitivity In (A)-0.03, 0.1, 0.3, 0.5, 1, 3
- Time delay (ms)-0, 60, 150, 300, 500, 800, 1.2s, 4s
- VigiPacT add-on may be equipped with an auxiliary contact (SDV) to remotely signal tripping due to an earth fault
- Self powered - "no external supply required"

MCCB Frame	Three Pole ⁽¹⁾ Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
NSX - 100/160	LV429488 ☒	25440	LV429489	28110
NSX - 250	LV429492	28050	LV429493	28680
NSX - 400/630	LV432464	69460	LV432465	72340

For details on non-standard references, technical parameters, stockable and non-stockable status, please contact Customer Care Centre.

☒ NORMAL STOCK ITEMS

W.E.F. January 30th, 2023